




Tri-Bollard

Area lighting



LED Bollard Light with Architectural Design.

Construction: Aluminium housing. IP66. IK10.

Installation: Via anchor bolts kit, included as standard.

Lens: Polycarbonate.

Finish: Black as standard.


LED: Available in 14w and 24w LED. 4000K, CRI >70 as standard. 3000K or other on request.

Driver: Internal LED driver. 220-240VAC 50/60Hz.

Options: DALI, 1-10V Dimming, symmetric/asymmetric optics, asymmetric shield.

Temperature: -30°C to +50°C

Product Compliance: EN 60598; CE.

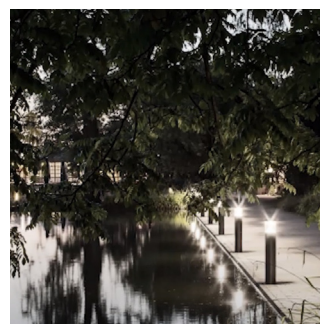




Shield Accessory



DIMENSIONS

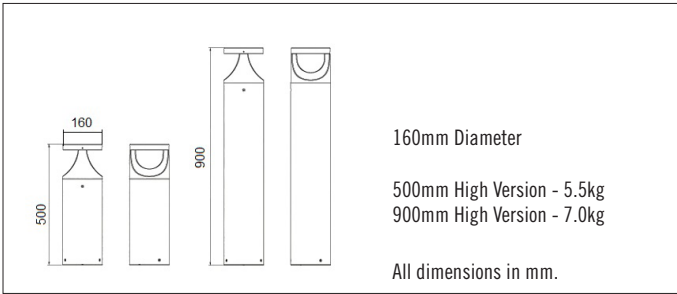

ORDERING CODE

Wattage	Type	Code	Description	Lumens
14w	LED	5TRB01450	Tri-Bollard light, Symmetric, 4000K, 500mm High	1150 lm
14w	LED	5TRB01490	Tri-Bollard light, Symmetric, 4000K, 900mm High	1150 lm
24w	LED	5TRB02450	Tri-Bollard light, Symmetric, 4000K, 500mm High	1950 lm
24w	LED	5TRB02490	Tri-Bollard light, Symmetric, 4000K, 900mm High	1950 lm

OPTIONS

3K: 3000K Colour Temperature

ASY: Asymmetric Optics

SH: Shield Accessory

DALI: Dali

DIM: 1-10V Dimming