




Iris Bollard

External lighting



Iris Bollard is suitable for paths, gardens or plaza areas.

Construction: Cast Aluminium Head.
Extruded Aluminium Shaft. IP65, IK09.


Lens: Clear Polycarbonate.

Installation: Flanged as standard.


Finish: Grey RAL 9006 as standard. Other colours on request.

LED: 13w 4000K, Lumileds 5050 LEDs as standard.

Product Compliance: EN 60598, CE.



DIMENSIONS

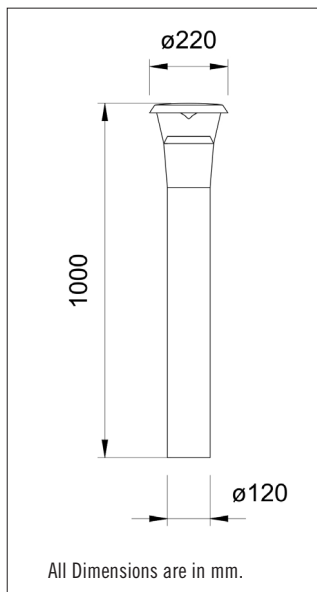

APPLICATION GUIDE


Iris Bollard

Standard height 1m

13w Symmetric

Contours in Lux

M. Factor = 0.90



ORDERING CODE

Wattage	Type	Code	Details	Lumens*
13w	LED	5IRI12LGA	1m high, Flanged, 4000K	921

* Luminaire lumen output.

OPTIONS

RAL: Pls specify