



Iris Post Top

External lighting



Architectural LED post-top luminaire for residential or pedestrian areas, gardens, parks, etc.

Construction: Die cast aluminium.
IP65, IK09.

Lens: Polycarbonate Lens.

Installation: Post-top on 60mm Diameter
Spigot (60mm high).

Finish: Grey RAL 9006 as standard.

LED: 40w to 60w 4000K,


Driver: 220-240V, 50/60Hz.

Mains Surge Protection: 20kA device
included as standard.

Product Compliance: EN 60598, CE.



DIMENSIONS

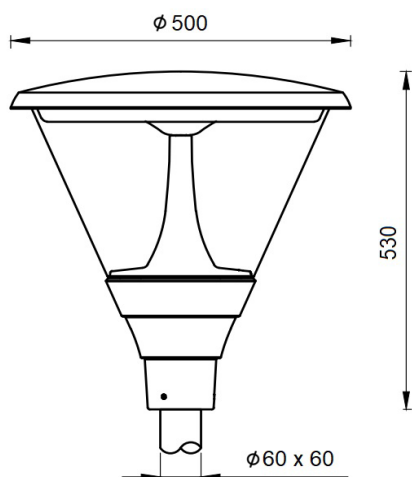


Weight: 9kg
EPA: 0.15m²

All Dimensions are in mm.

APPLICATION GUIDE

Iris Post Top
Height 4m
40w LED Symmetric 4000K
Contours in Lux
M. Factor = 0.90



ORDERING CODE

Wattage	Type	Code	Details	Lumens*
40w	LED	5IRD14LGA	Post Top, Symmetric, 60mm Mastfitter, 4000K	4400
60w	LED	5IRD16LGA	Post Top, Symmetric, 60mm Mastfitter, 4000K	6600

* Luminaire lumen output.

OPTIONS

RAL: Pls specify
DALI: Dali Dimming